

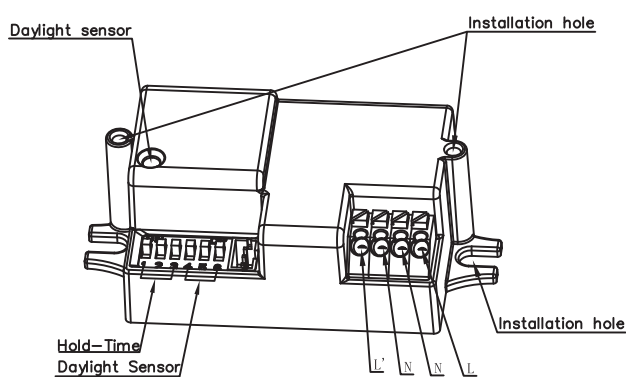
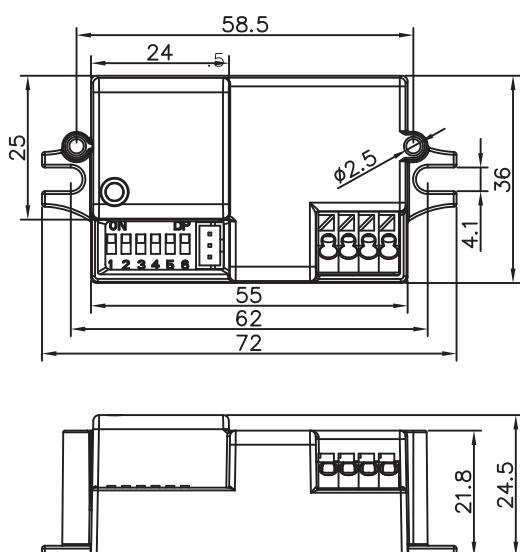




Model: UC06/KD



Model: ANT23




Model: ANT61
Zhaga Book20

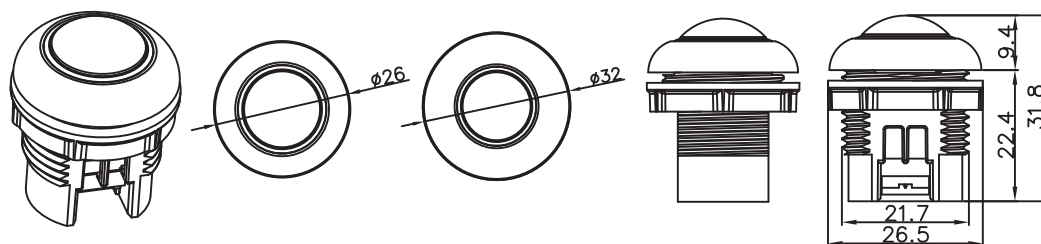

Product Feature

On/off function

The motion detector can turn on the light based on movement. With this detector built in, light is automatically on when needed and off when not needed.

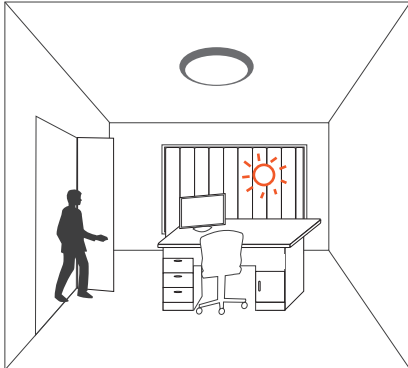

The light keeps off during daytime even when movement is detected. (Ambient lux level is above preset daylight threshold)




With movement and insufficient ambient lux level, the light is triggered on by the detector.




If there is no more movement, the light turns off automatically after hold-time preset.

Wiring

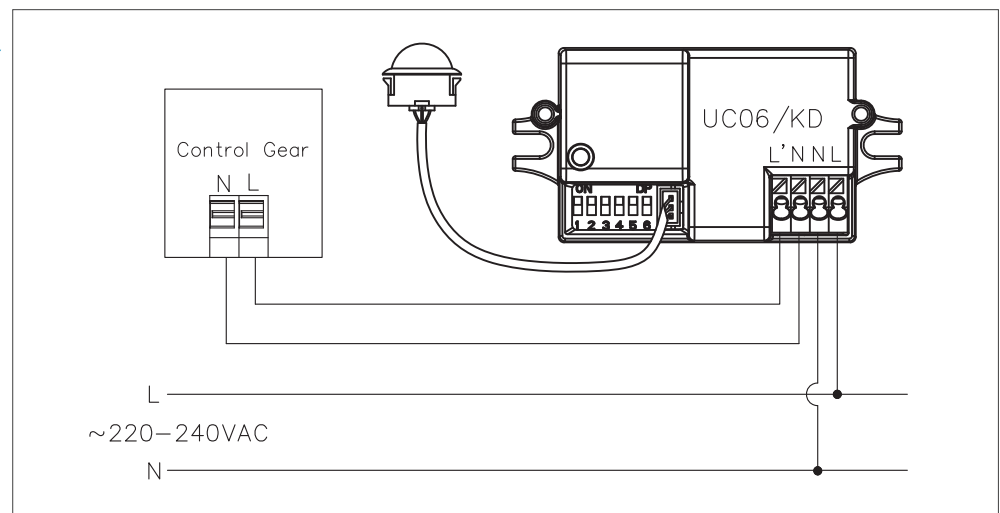

Detection pattern

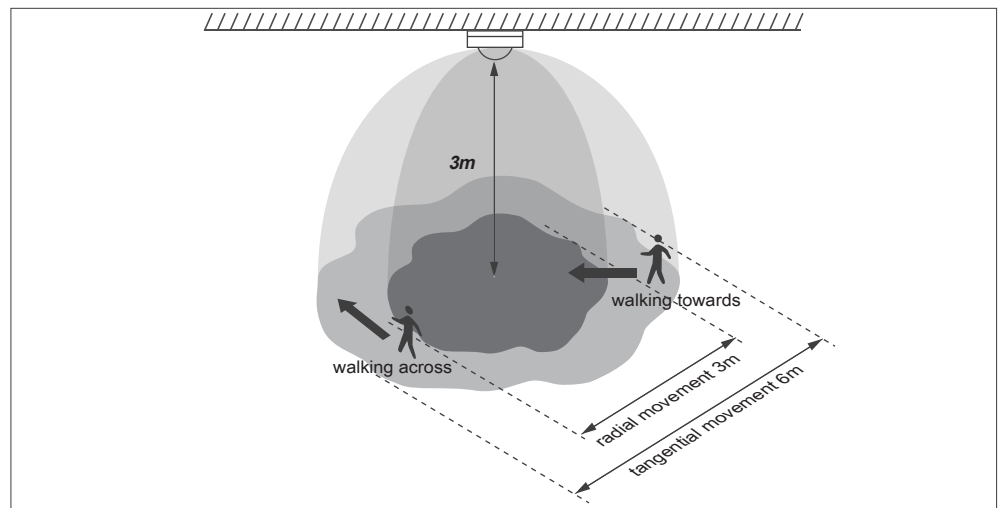

Settings

1. Hold-time

Hold-time refers to the time period that the light remains 100% on if no more movement is detected.

I – 5s
II – 30s
III – 1min
IV – 3min
V – 5min
VI – 10min
VII – 20min
VIII – 30min



	1	2	3	
I	●	●	●	5s
II	●	●	○	30s
III	●	○	●	1min
IV	●	○	○	3min
V	○	●	●	5min
VI	○	●	○	10min
VII	○	○	●	20min
VIII	○	○	○	30min

2. Daylight threshold

Different daylight threshold can be preset on DIP switches. Light will always turn on upon movement if daylight sensor is disabled.

I – 2Lux
II – 10Lux
III – 25Lux
IV – 50Lux
V – Disable



	4	5	6	
I	●	●	●	2Lux
II	●	●	○	10Lux
III	○	●	○	25Lux
IV	●	○	○	50Lux
V	○	○	○	Disable

Specification

Operating voltage	220 ~ 240 VAC 50/60Hz
Rated load	400W (Capacitive load) 800W (Resistive load)
Stand-by power	<0.2W
Hold-time	5s / 30s / 1min / 3min / 5min / 10min / 20min / 30min
Daylight sensor	2lux / 10lux / 25lux / 50lux, disable
Detection range	Max. installation height: 3m Max. detection range: Ø 6m @ 3m installation height
Detection angle	30° ~ 150°
Working temperature	-20°C ~ 60°C
IP rating	IP20
Certificate	CE, UKCA, RCM, RED